

LED Graphic Unit



Specification


External Dimensions: 42 mm (H) x 42 mm (W) x 139 mm (L)

Luminous color	Green	White	Blue	Amber	Red
Power consumption	6.3 W (typ)				5.0 W (typ)
Illuminance (When irradiated at 1 m in front)	1500 lx	980 lx	85 lx	570 lx	390 lx

Rated Constant Input Voltage: DC 24 V
Please consult separately for DC 12 V.
Operating temperature range: -20~50°C

Weight: approx. 350 g
Flashing: 0.9sec, 0.6sec, 0.3sec
* Power source is not sold by our company.
• Dimming and color adjustment functions are not available.
• Outdoor use is not supported when used alone (indoor use only).

Dimensions
Unit: mm

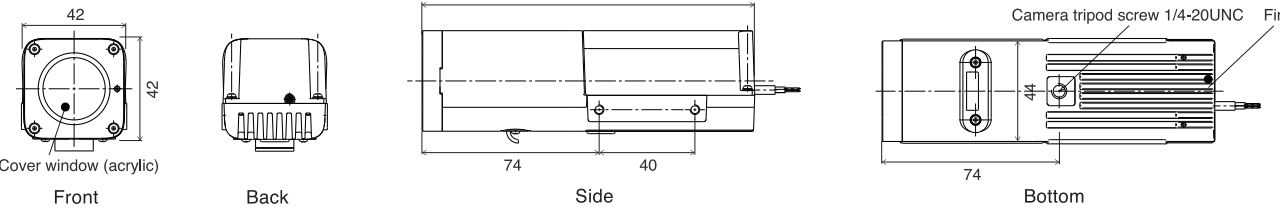

Compact LED Graphic Unit that can smartly illuminate letters and designs with light

This product realizes smart alerts and indicates points of emphasis with optical drawings.
Low power consumption and a compact design means it can be incorporated.
Multiple drawing designs available to accommodate a variety of situations.

High visibility drawing with compact body	High light use efficiency enables bright, highly visible images despite its compact size. Low power consumption enables integration into a variety of devices.
Focus-free	No need to adjust the focus.
Selectable drawing designs	Drawing designs can be selected from multiple options.

Displayed designs

Standard product	Custom products (available upon request)			

Usage ideas

Emphasize accessibility indications



Indicate transport vehicles' direction of travel for safety purposes in factory or warehouse



Saving person-hours for information guidance, etc.



Safer Autonomous Mobile Robots (AMRs) Helping to Save Labor at Logistics Centers!

Logistics companies that support the logistics operations of major car manufacturers and many other companies manage their clients' cargo from storage and sorting, to shipping. Autonomous Mobile Robots (AMR) are indispensable for manpower saving at such sites. AMRs are equipped with Stanley's "LLM1546A" to ensure safety at sites where workers and AMRs cross paths.



Access movie



ADOPTED PRODUCT
LEDSHIGHLIGHT
LLM1546A x 20 units

